#### CSE 421/521 - Operating Systems Fall 2011

LECTURE - XIII


## MAIN MEMORY MANAGEMENT - II

Tevfik Koşar

University at Buffalo October 13th, 2011

## Roadmap

- Main Memory Management
  - Fragmentation
  - Address Binding
  - HW Address Protection
  - Paging



## Dynamic Storage-Allocation Problem

How to satisfy a request of size *n* from a list of free holes

- First-fit: Allocate the first hole that is big enough
- **Best-fit**: Allocate the *smallest* hole that is big enough; must search entire list, unless ordered by size. Produces the smallest leftover hole.
- Worst-fit: Allocate the largest hole; must also search entire list. Produces the largest leftover hole.

First-fit is faster.

Best-fit is better in terms of storage utilization.

Worst-fit may lead less fragmentation.

30

### **Fragmentation**

- External Fragmentation total memory space exists to satisfy a request, but it is not contiguous (in average ~50% lost)
- Internal Fragmentation allocated memory may be slightly larger than requested memory; this size difference is memory internal to a partition, but not being used
- Reduce external fragmentation by compaction
  - Shuffle memory contents to place all free memory together in one large block
  - Compaction is possible *only* if relocation is dynamic, and is done at execution time


## **Address Binding**

- Addresses in a source program are generally symbolic
  - eg. int count;
- A compiler binds these symbolic addresses to relocatable addresses
  - eg. 100 bytes from the beginning of this module
- The linkage editor or loader will in turn bind the relocatable addresses to absolute addresses
  - eg. 74014
- Each binding is mapping from one address space to another

5


## **Logical Address Space**

- Each process has a separate memory space
- Two registers provide address protection between processes:
- Base register: smallest legal address space
- Limit register: size of the legal range



## Memory-Management Unit (MMU)


- Hardware device that maps logical to physical address
- In MMU scheme, the value in the relocation register (base register) is added to every address generated by a user process at the time it is sent to memory
- The user program deals with logical addresses; it never sees the real physical addresses



7

### **HW Address Protection**

- CPU hardware compares every address generated in user mode with the registers
- Any attempt to access other processes' memory will be trapped and cause a fatal error

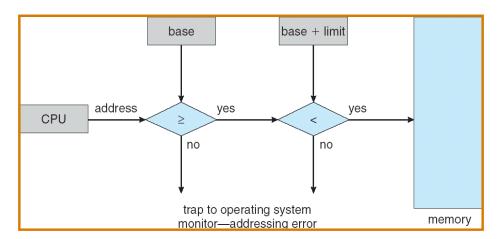

## Paging - noncontiguous


- Physical address space of a process can be noncontiguous
- Divide physical memory into fixed-sized blocks called frames (size is power of 2, between 512 bytes and 16 megabytes)
- Divide logical memory into blocks of same size called pages.
- Keep track of all free frames
- To run a program of size n pages, need to find n free frames and load program
- Set up a page table to translate logical to physical addresses
- Internal fragmentation

37

#### **Address Translation Scheme**


- Address generated by CPU is divided into:
  - Page number (p) used as an index into a page table which contains base address of each page in physical memory
  - Page offset (d) combined with base address to define the physical memory address that is sent to the memory unit


## **Address Translation Architecture**

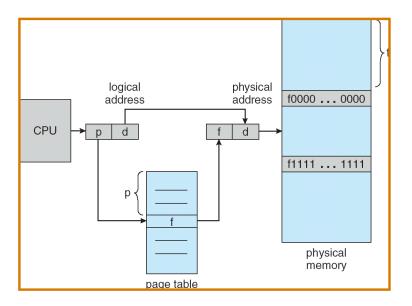


39

# Paging Example



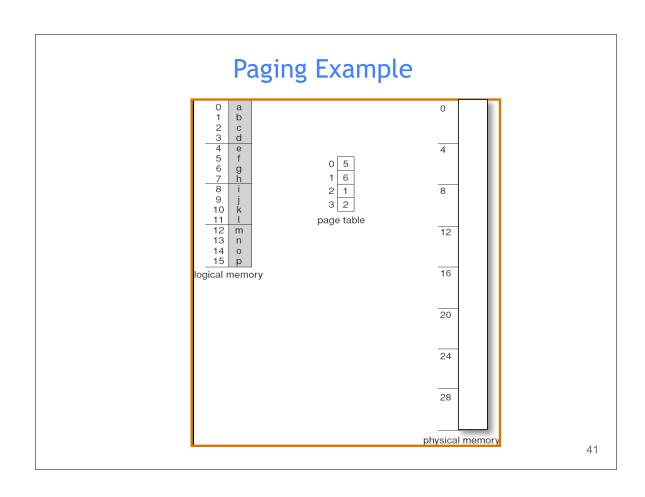

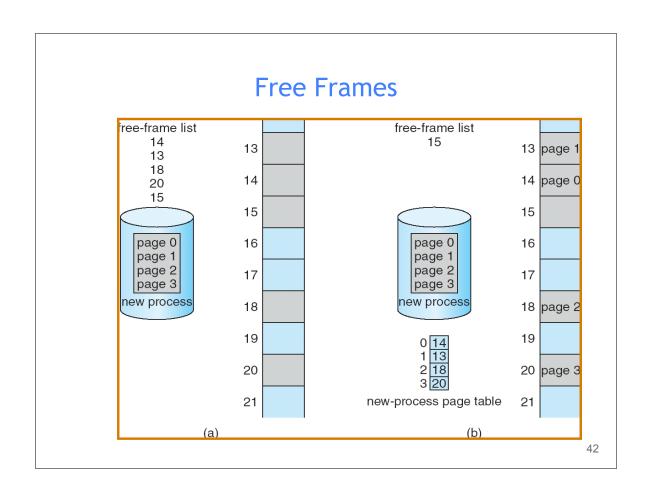

## **Shared Pages**

#### Shared code


- One copy of read-only (reentrant) code shared among processes (i.e., text editors, compilers, window systems).
- Shared code must appear in same location in the logical address space of all processes

#### Private code and data


- Each process keeps a separate copy of the code and data
- The pages for the private code and data can appear anywhere in the logical address space

22

## **Shared Pages Example**



## User's View of a Program




24

## Segmentation

- Memory-management scheme that supports user view of memory
- A program is a collection of segments. A segment is a logical unit such as:

```
main program,
procedure,
function,
method,
object,
local variables, global variables,
common block,
stack,
symbol table, arrays
```

# Logical View of Segmentation



2

physical memory space

26

# **Summary**

- Main Memory Management
  - Fragmentation
  - Address Binding
  - HW Address Protection
  - Paging



Next Lecture: Midterm Review

## Acknowledgements

- "Operating Systems Concepts" book and supplementary material by A. Silberschatz, P. Galvin and G. Gagne
- "Operating Systems: Internals and Design Principles" book and supplementary material by W. Stallings
- "Modern Operating Systems" book and supplementary material by A. Tanenbaum
- R. Doursat and M. Yuksel from UNR