



Background


- Virtual memory separation of user logical memory from physical memory.
 - Only part of the program needs to be in memory for execution.
 - Logical address space can therefore be much larger than physical address space.
 - Allows address spaces to be shared by several processes.
 Allows for more efficient process creation.
 - Allows for more efficient process creation.
- Virtual memory can be implemented via:
 - Demand paging
 - Demand segmentation


Demand Paging


- Bring a page into memory only when it is needed
 Less I/O needed
 - Less memory needed
 - Faster response
 - More users
- Page is needed ⇒ reference to it
 - invalid reference \Rightarrow abort
 - not-in-memory \Rightarrow bring to memory





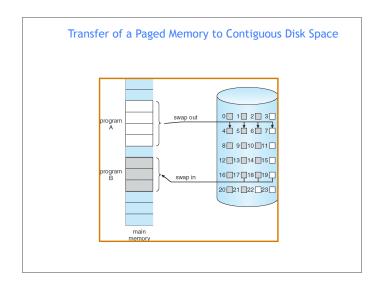

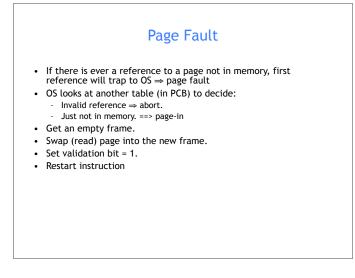

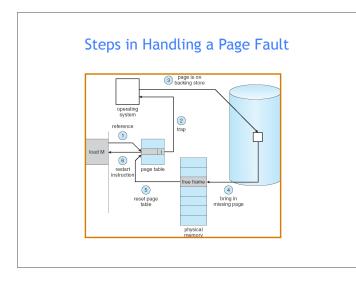

What happens if there is no free frame?


- Page replacement find some page in memory, but not really in use, swap it out
 - Algorithms (FIFO, LRU ..)
 - performance want an algorithm which will result in minimum number of page faults
- Same page may be brought into memory several times

Page Replacement

- Prevent over-allocation of memory by modifying pagefault service routine to include page replacement
- Use modify (dirty) bit to reduce overhead of page transfers - only modified pages are written to disk
- Page replacement completes separation between logical memory and physical memory - large virtual memory can be provided on a smaller physical memory


Basic Page Replacement

- 1. Find the location of the desired page on disk
- 2. Find a free frame:
 - If there is a free frame, use it
 - If there is no free frame, use a page replacement algorithm to select a victim frame
- 3. Read the desired page into the (newly) free frame. Update the page and frame tables.
- 4. Restart the process

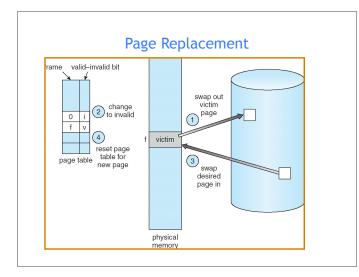



Page Replacement Algorithms


- Want lowest page-fault rate
- Evaluate algorithm by running it on a particular string of memory references (reference string) and computing the number of page faults on that string
- In all our examples, the reference string is 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

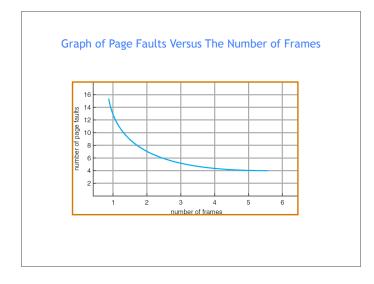



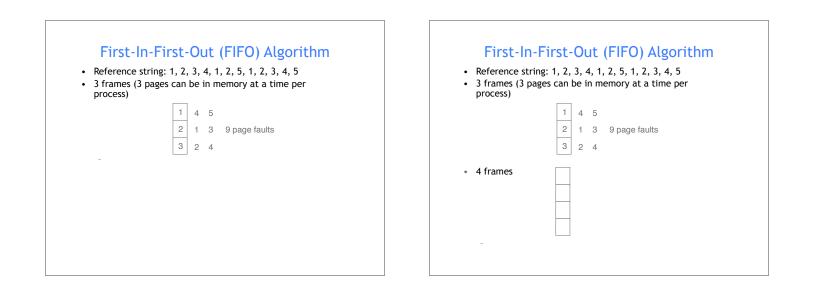



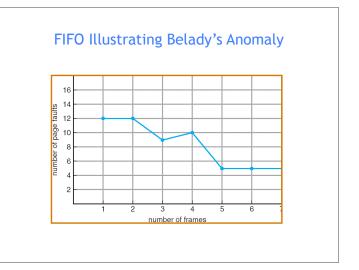

Performance of Demand Paging


- Page Fault Rate $0 \le p \le 1.0$
 - if *p* = 0 no page faults
 - if p = 1, every reference is a fault
- Effective Access Time (EAT)
 - EAT = (1 p) x memory access
 - + p x (page fault overhead
 - + [swap page out]
 - + swap page in
 - + restart overhead)

Demand Paging Example

- Memory access time = 1 microsecond
- 50% of the time the page that is being replaced has been modified and therefore needs to be swapped out
- Swap Page Time = 10 msec = 10,000 microsec
- EAT = ?

Demand Paging Example

- Memory access time = 1 microsecond
- 50% of the time the page that is being replaced has been modified and therefore needs to be swapped out
 Swap Page Time = 10 msec = 10,000 microsec
- Swap Page Time = To msec = T0,000 microsec
- EAT = (1 p) x 1 + p x (10,000 + 1/2 x 10,000) = 1 + 14,999 x p (in microsec)
- What if 1 out of 1000 memory accesses cause a page fault?
- What if we only want 30% performance degradation?

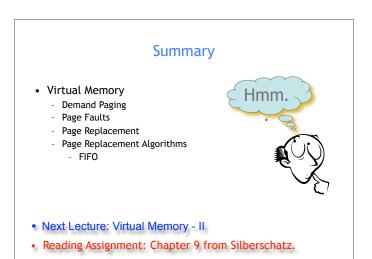

Acknowledgements

- "Operating Systems Concepts" book and supplementary material by A. Silberschatz, P. Galvin and G. Gagne
- "Operating Systems: Internals and Design Principles" book and supplementary material by W. Stallings
- "Modern Operating Systems" book and supplementary material by A. Tanenbaum
- R. Doursat and M. Yuksel from UNR